

Twist-beam axle for the rear suspension of a motor vehicle  
and method for its production

The present invention relates to a twist-beam axle for the rear suspension of a motor vehicle, as well as a method for the production of such a twist-beam axle.

It is known in the automotive field the use of rear suspensions in which the two rear wheels are interconnected by means of a twist-beam axle comprising basically a central cross-member compliant to torsion, which extends substantially transversely, and a pair of rigid trailing arms, attached to the ends of the cross-member, which support the rear wheels and provide the articulation of the axle to the vehicle body.

According to the prior art, the trailing arms of the twist-beam axle are formed as elongated integral bodies, for example of tubular shape, which are securely connected to the cross-member, for example by welding. Alternatively, a pair of trailing half-arms, that is, a front half-arm and a rear half-arm, respectively, may be provided for instead of a single trailing arm, wherein usually the rear half-arm is formed as a single piece with the cross-member whereas the front one is fixed to the cross-member, for example by welding. These known arrangements, which require a welded joint to be provided between the trailing arms, or the half-arms, and the cross-member, require a high dimensional and shape precision in the welding zones, in order to ensure the correct relative positioning of the parts to be connected and the strength of the welded connection.

It is the object of the present invention to provide an improved twist-beam axle for the rear suspension of a motor vehicle with respect to the prior art, which is strong and easy to manufacture and which enables the taking-up of possible plays in the zones of connection between the trailing arms and the cross-member.

This object is fully achieved according to the invention by virtue of a twist-beam axle for the rear suspension of a motor vehicle having the characteristics defined in independent Claim 1. According to another aspect of the invention, this object is fully achieved by virtue of a method for the production of a twist-beam axle for the rear suspension of a motor vehicle as defined in independent Claim 9.

In short, the invention is based on the idea of providing a twist-beam axle in which each of the two trailing arms is comprised of a pair of first, transversely inner half-shells, that is, a front half-shell and a rear half-shell, respectively, securely connected to each other and to the respective end of the cross-member by welding, and of a second, transversely outer half-shell, securely connected to the first two half-shells by welding so as to form therewith a rigid body having a closed cross-section.

The characteristics and the advantages of the invention will appear from the detailed description which follows, given purely by way of non-limiting example with reference to the appended drawings, in which:

Figures 1 and 2 are perspective views from above and from below, respectively, of a side end portion of a twist-beam axle

according to the invention;

Figure 3 is an exploded perspective view of the portion of twist-beam axle shown in Figures 1 and 2;

Figure 4 is a plan view from above of the portion of twist-beam axle shown in the preceding figures;

Figure 5 is a section view along line V-V in Figure 4 of the portion of twist-beam axle shown in the preceding figures;

Figure 6 is a section view along line VI-VI in Figure 4 of the portion of twist-beam axle shown in Figures 1 to 4;

Figure 7 is a section view along line VII-VII in Figure 4 of the portion of twist-beam axle shown in Figures 1 to 4;

Figure 8 is a section view along line VIII-VIII in Figure 4 of the portion of twist-beam axle shown in Figures 1 to 4; and

Figure 9 is a section view along line IX-IX in Figure 4 of the portion of twist-beam axle shown in Figures 1 to 4.

In the description and the claims which follow, terms such as "longitudinal" and "transverse", "inner" and "outer", "front" and "rear" are to be understood as referred to the mounted condition on the vehicle.

Although only one of the two symmetric parts forming the structure of the twist-beam axle in question has been described and illustrated, for clear reasons of simplicity, it

is clearly understood that the non-described part is to be considered symmetric, or substantially symmetric, to that described.

By referring initially to Figures 1 to 4, a twist-beam axle for the rear suspension of a motor vehicle is generally indicated 10 and comprises a central cross-member 11 and a pair of trailing arms 12 fixed to respective side end portions 11a of the cross-member (in the figures only the left-hand end is shown). A bush 13 for articulation of the twist-beam axle 10 to the vehicle body is fixed to the front end of each trailing arm 12, whereas on a mounting structure 14 for a wheel-carrier (not shown) and a sheet plate 15 intended to provide a lower support surface for a spring (also, not shown) are fixed to the rear portion of the arm 12, on the transversely outer side and the transversely inner side, respectively.

The middle portion of the cross-member 11, indicated 11b, has in its vertical plane of symmetry a cross-section of predetermined shape, in the illustrated example an omega-shape, adapted to provide the cross-member with the required elastic characteristics, in particular the compliance to torsion. The end portions 11a of the cross-member 11 form each a head wall 11c, downwardly inclined in the transverse direction, in which a hole 16 is provided for being passed through by a torsion bar 17 housed inside the middle portion 11b of the cross-member 11 and fixed at its ends to the trailing arms 12. Alternatively, the torsion bar 17 may be fixed to the head walls 11c of the side portions 11a of the cross-member, instead of being fixed to the trailing arms 12. Moreover, the middle portion 11b of the cross-member may assume obviously any other suitable shape, either open (as in the illus-

trated example) or closed.

According to the invention, each trailing arm 12 is comprised of three sheet metal parts 18, 19 and 20, formed as half-shells with open, essentially C-shaped cross-section, securely connected to each other, preferably by welding. These elements are a pair of transversely inner half-shells 18 and 19, that is, a front half-shell and a rear half-shell, respectively, intended to be fixed to the end portion 11a of the cross-member 11, and a transversely outer half-shell 20, intended to be fixed to the two inner half-shells 18, 19 so as to close the cross-section of the arm 12.

Each of the two inner half-shells 18, 19 comprises a first limb 18a, 19a which extends essentially transversely and a second limb 18b, 19b, integral with the first one, which extends essentially longitudinally or is slightly inclined outwards relative to the longitudinal direction (Figure 3).

Each first limb 18a, 19a is arranged to be welded both to the respective end portion 11a of the cross-member, along a transversely inner edge 21 suitably shaped to fit to the cross-member portion 11a, and to the other first limb 19a, 18a, along a pair of transverse straight edges 22, 23 that is, an upper edge and a lower edge, respectively, arranged in use facing each other. Each second limb 18b, 19b is arranged to be welded to the outer half-shell 20 along a pair of transversely outer edges 24, 25 that is, an upper edge and a lower edge, respectively.

In order to enable to take up possible plays between the two inner half-shells 18, 19 and the cross-member portion 11a,

the two half-shells are shaped and dimensioned in such a manner that, when they are arranged in their mounting position on to the cross-member, their facing edges 22, 23 are spaced apart by a certain gap, though very little, which is then filled by the welding bead which joins the two half-shells together along the edges 22, 23 during the assembling of the axle.

Each transversely outer half-shell 20 has a substantially C-shaped cross-section, the upper and lower horizontal walls of which form transversely inner edges 26 and 27, that is, an upper edge and a lower edge, respectively, for connection by welding to the transversely outer edges of the longitudinal limbs of the half-shells 18, 19. Where the torsion bar 17 is fixed to the trailing arms 12, as in the illustrated embodiment, the vertical walls of the outer half-shells 20 have respective holes 28 for engaging the ends of the bar 17.

As can be seen in the exploded view of Figure 3 and in the section view of Figure 6, each rear inner half-shell 19 and each outer half-shell 20 have respective through holes 29 and 30 into which a pin 31 is inserted for fixing the lower end of a damper (not shown).

As will be clear in the light of the preceding description, the method of production of a twist-beam axle according to the invention provides for, first of all, the manufacturing of the single parts of the axle, that is to say, the cross-member 11, the torsion bar 17 and the half-shells 18 to 20 intended to compose the trailing arms 12, and then the assembling of these parts by welding the pairs of inner half-shells 18, 19 onto the cross-member 11 and the outer half-

shells 20 onto the pairs of inner half-shells of the respective trailing arms.

Since the joining edges 21 to 27 of the half-shells 18 to 20 extend essentially in two dimensions, instead of three dimensions, the welding operations are easy to perform.

Naturally, the principle of the invention remaining unchanged, embodiments and manufacturing details may vary widely from those described and illustrated purely by way of non-limiting example.

CLAIMS

1. Twist-beam axle for the rear suspension of a motor vehicle, of the type comprising a central cross-member (11) compliant to torsion and a pair of trailing arms (12) fixed to respective side end portions (11a) of the cross-member (11) for articulated connection of the axle to the vehicle body and for support of the rear wheels; characterised in that each trailing arm (12) is formed by a pair of first, transversely inner half-shells (18, 19), that is, a front half-shell and a rear half-shell, respectively, securely connected to each other and to the respective end (11a) of the cross-member (11), and by a second, transversely outer half-shell (20), securely connected to the pair of first half-shells (18, 19) so as to form therewith a structure having a closed cross-section.

2. Twist-beam axle according to Claim 1, characterised in that each of the first half-shells (18, 19) comprises a first limb (18a, 19a) which extends essentially transversely and is securely connected to the respective end (11a) of the cross-member (11) and to the other first half-shell (19, 18) of the same trailing arm (12), and a second limb (18b, 19b), integral with the first (18a, 19a), which extends essentially longitudinally and is securely connected to the second half-shell (20) of the arm (12).

3. Twist-beam axle according to Claim 2, characterised in that both the first and second limbs (18a, 18b; 19a, 19b) of the first half-shells (18, 19) and the second half-shells (20) have, at least over part of their length, a substantially C-shaped cross-section, the upper and lower horizontal

walls of which form respective joining edges (22, 23; 24, 25; 26, 27), facing two by two, for connection of the two inner half-shells (18, 19) to each other and for connection of the two inner half-shells (18, 19) to the outer half-shell (20).

4. Twist-beam axle according to Claim 2, characterised in that the first limbs (18a, 19a) of the first half-shells (18, 19) form, on the transversely inner side, respective joining edges (21) for connection of the two half-shells to the respective end portion (11a) of the cross-member (11).

5. Twist-beam axle according to Claims 3 and 4, characterised in that the first half-shells (18, 19) and the end portions (11a) of the cross-member (11) are so shaped and dimensioned that, with the half-shells (18, 19) arranged in their mounting position onto the cross-member, the facing joining edges (22, 23) for connection of the pairs of half-shells (18, 19) are spaced apart by a minimum gap, thereby enabling the taking up of possible plays between each pair of half-shells (18, 19) and the respective cross-member portion (11a).

6. Twist-beam axle according to any of the preceding claims, characterised in that the first and second half-shells (18, 19, 20) of each trailing arm (12) are connected to each other by welding and in that the first half-shells (18, 19) of each trailing arm (12) are connected to the respective end portion (11a) of the cross-member (11) by welding.

7. Twist-beam axle according to any of the preceding claims, characterised in that the cross-member (11) has, in


its vertical plane of symmetry, an omega-shaped cross-section.

8. Twist-beam axle according to Claim 7, characterised in that it comprises also a torsion bar (17) housed inside the cross-member (11) and fixed at its ends to the second half-shells (20) of the trailing arms (12).


9. A method for the production of a twist-beam axle (10) for the rear suspension of a motor vehicle, comprising the steps of:

- a) providing a cross-member (11) compliant to torsion and having side end portions (11a) for engaging a pair of trailing arms (12);
- b) providing, for each end portion (11a) of the cross-member (11), a pair of first, transversely inner half-shells (18, 19), that is, a front half-shell and a rear half-shell, respectively, adopted to be securely connected to each other and to the cross-member portion (11a), and a second, transversely outer half-shell (20) adopted to be securely connected to the pair of first half-shells (18, 19) so as to form therewith a rigid body of closed cross-section;
- c) securely connecting the two pairs of first half-shells (18, 19) onto the respective end portions (11a) of the cross-member (11);
- d) securely connecting each of the second half-shells (20) onto the respective pair of first half-shells (18, 19) so as to form therewith a trailing arm (12).

FIG. 1

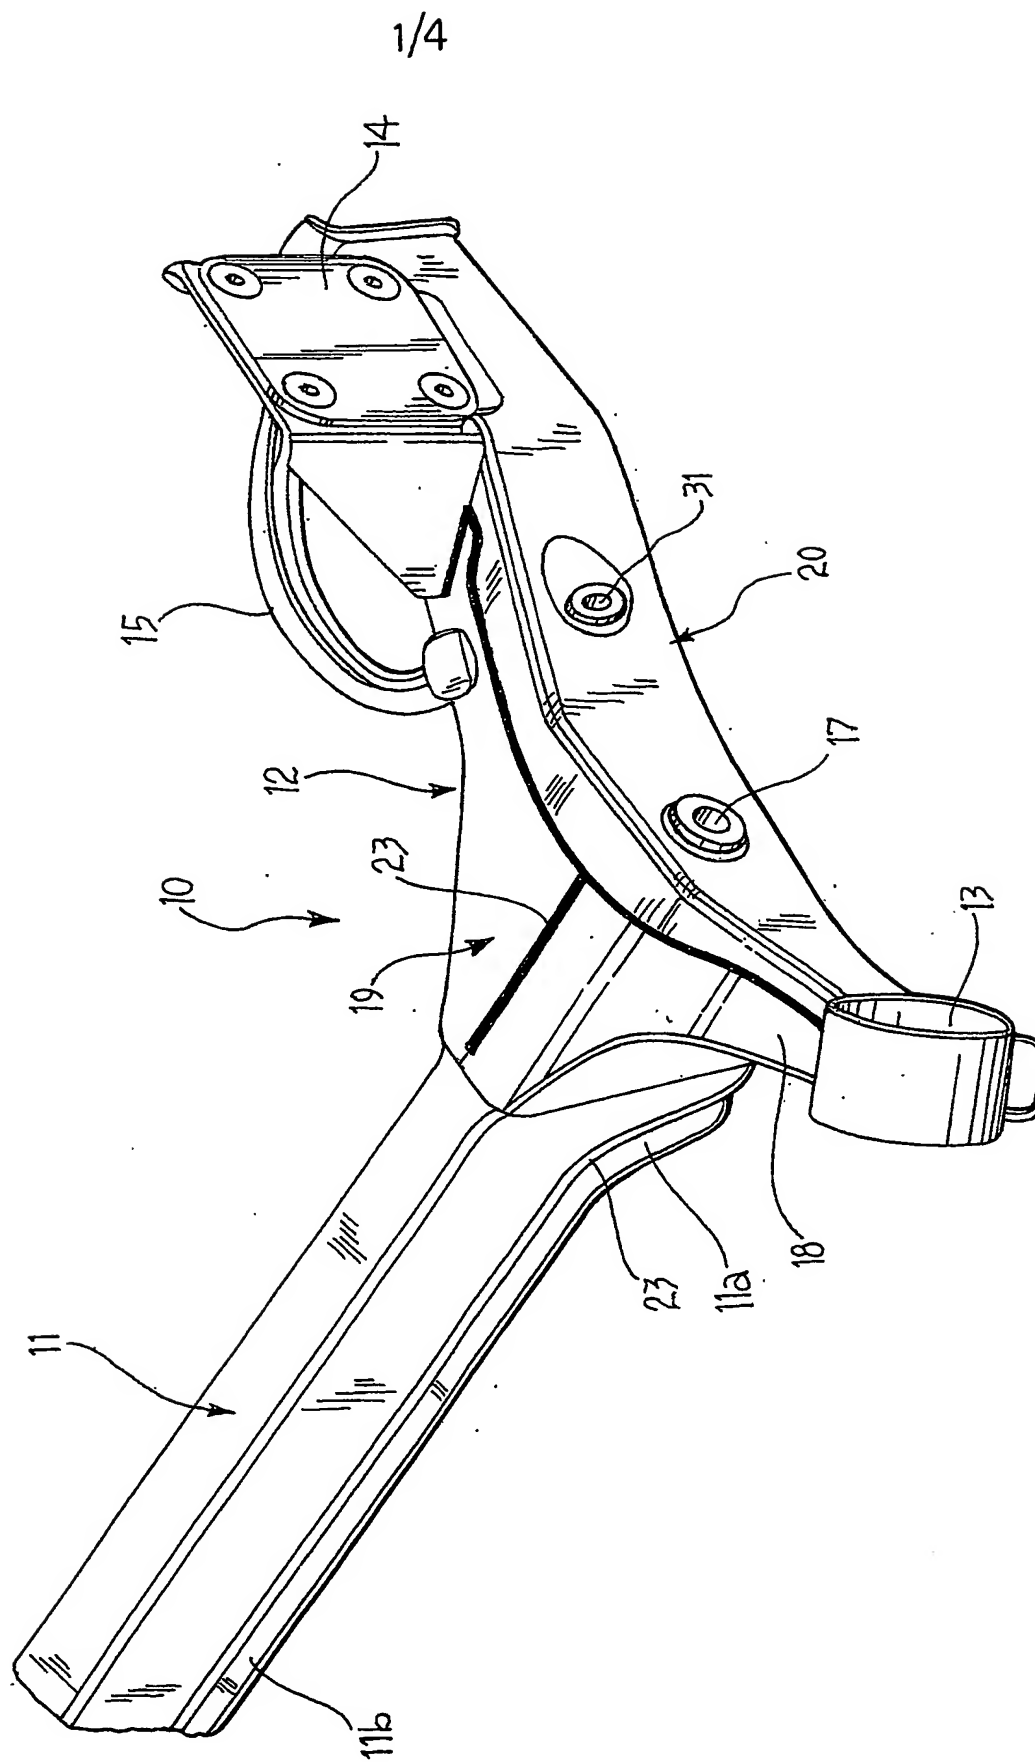

2/4

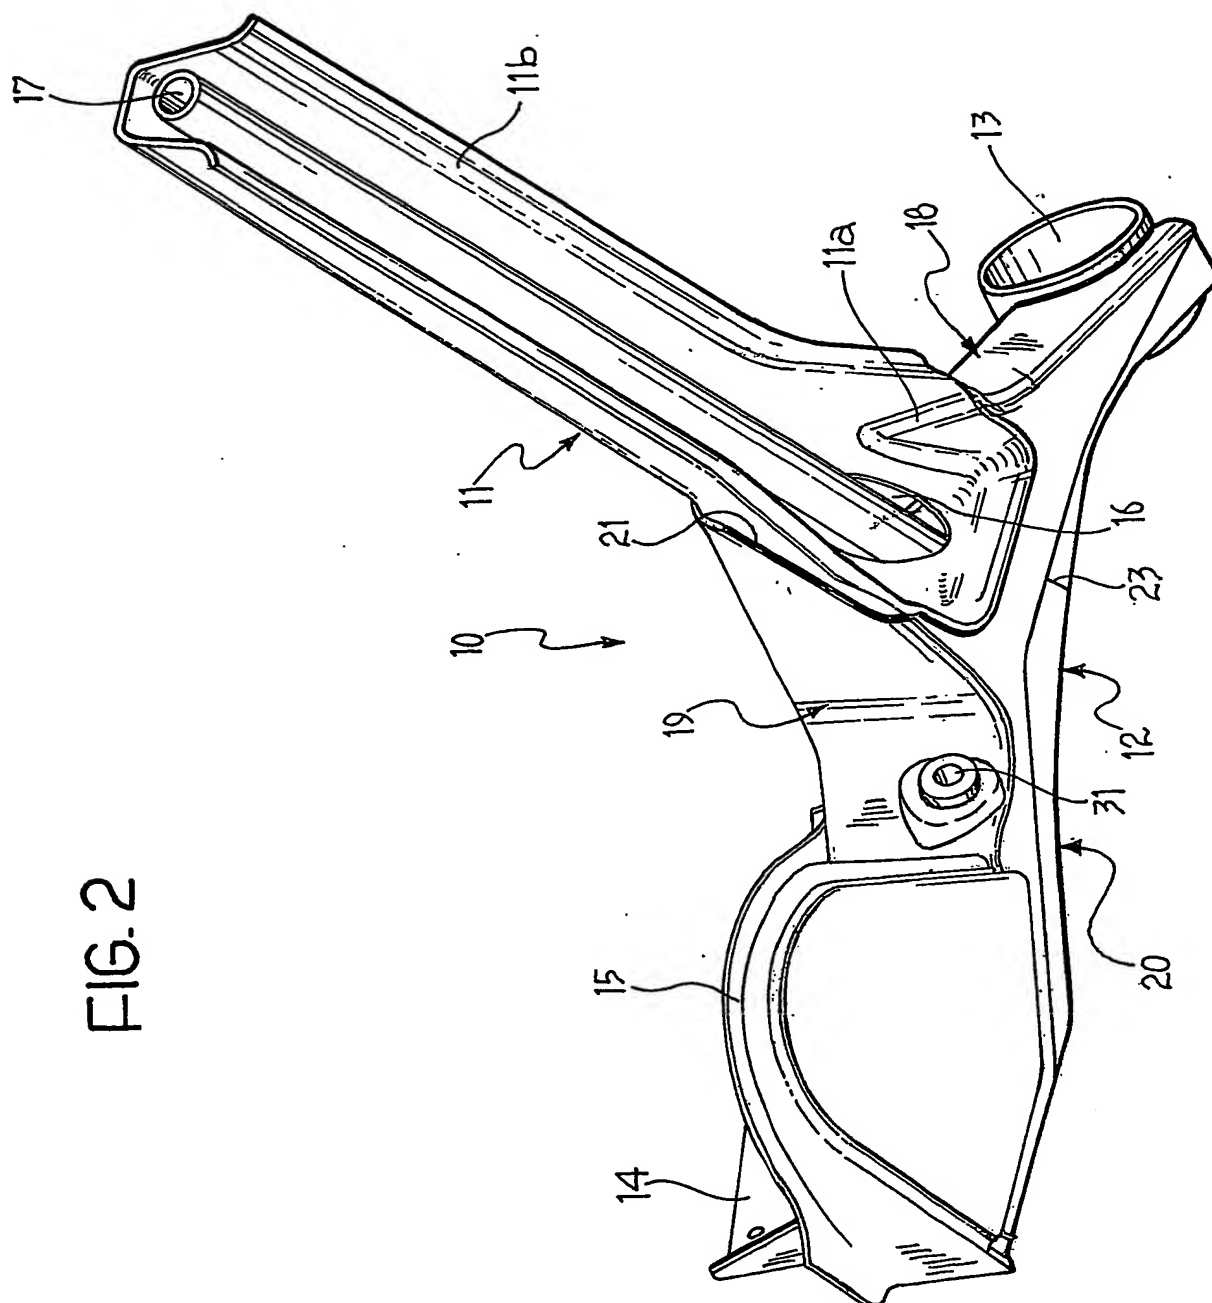

3/4







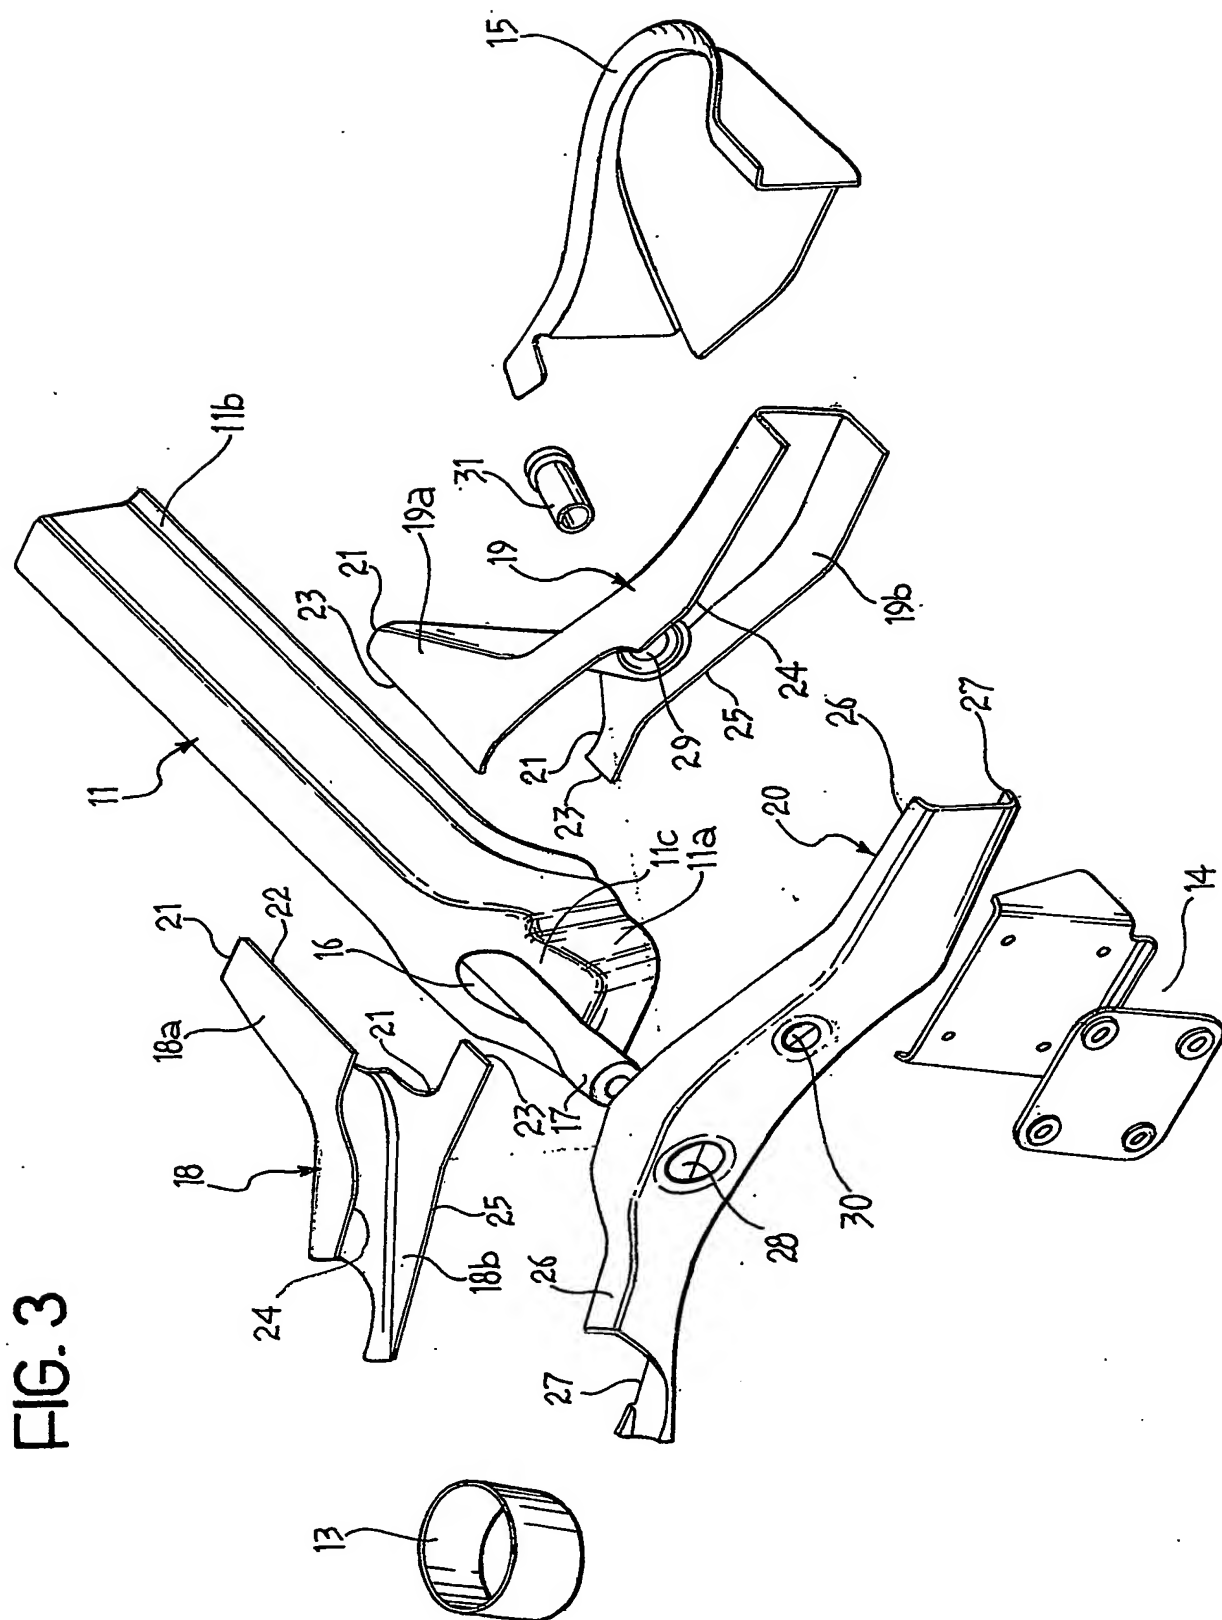


FIG. 3

4/4

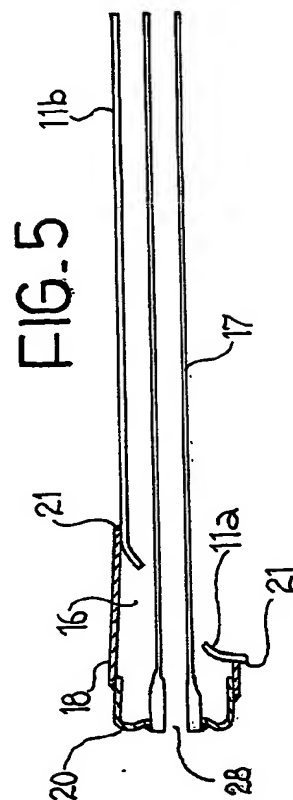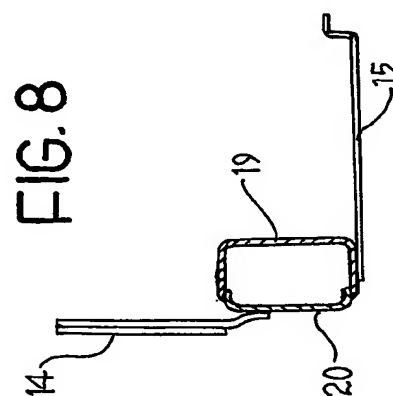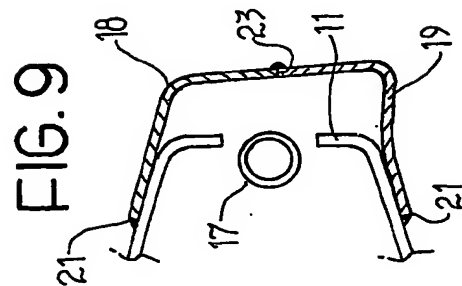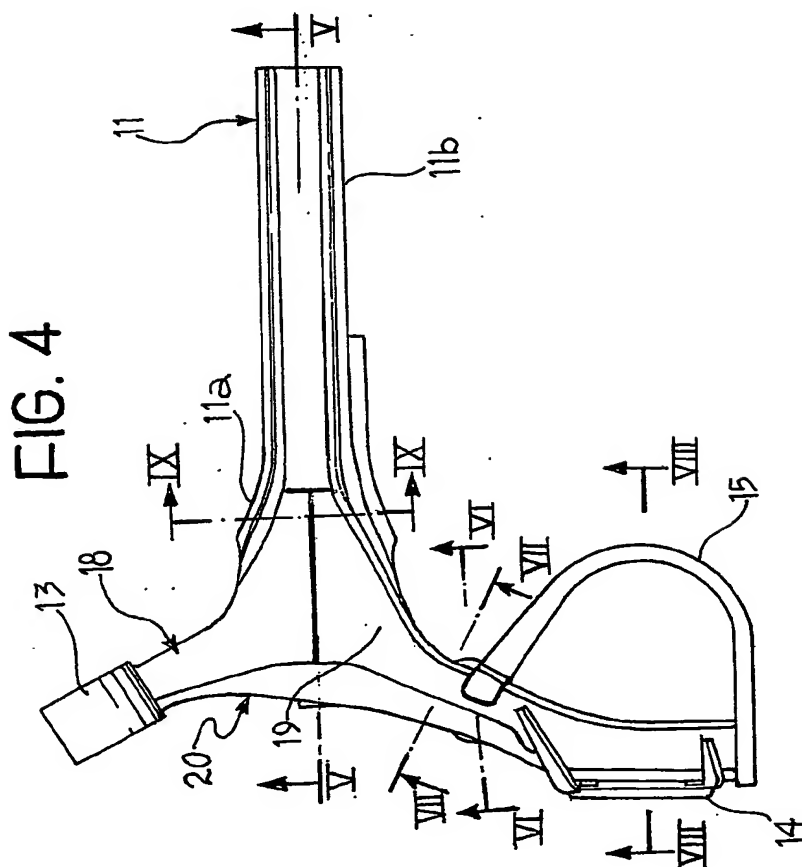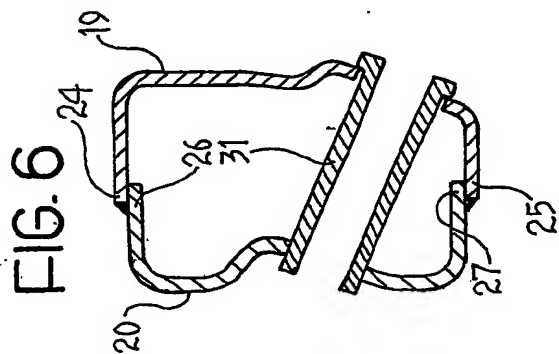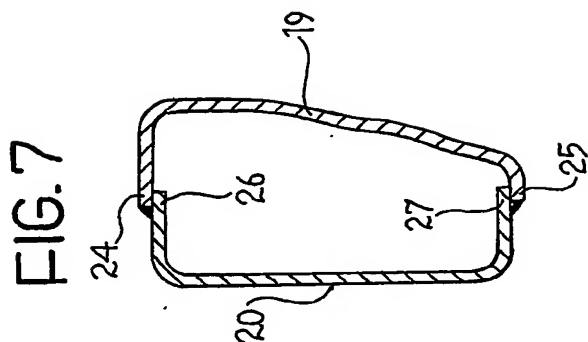

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/12337

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60G21/05 B60G7/00 B60B35/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60G B60B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 743 205 A (VALLOUREC VITRY) 20 November 1996 (1996-11-20)	1,2
Y	the whole document	6-8
A		3,4
Y	US 4 486 030 A (TAKATA NAOTO ET AL) 4 December 1984 (1984-12-04)	1,2,6,8
A	column 2, line 51 - column 3, line 62; figures	3,4
Y	US 6 047 978 A (MURATA SATOSHI ET AL) 11 April 2000 (2000-04-11)	1,2,6,8
A	column 5, line 25 - line 47; figures 1,2,6 column 6, line 46 - line 65	9
Y	US 4 432 564 A (TRONVILLE PIER G) 21 February 1984 (1984-02-21)	7
A	figures 1-4	1,8,9
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

13 February 2004

Date of mailing of the international search report

25/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tsitsilonis, L

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/12337

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 165 098 A (WAGNER DAVID A) 21 August 1979 (1979-08-21)	1
A	figures 1,5,6	2,6,9
Y	US 6 059 314 A (STREUBEL WOLFGANG ET AL) 9 May 2000 (2000-05-09) column 4, line 18 -column 5, line 5; figures 1,5 column 5, line 49 -column 6, line 3	1
Y	EP 0 861 744 A (FORD GLOBAL TECH INC) 2 September 1998 (1998-09-02)	1
A	figures 1-4,10	9
Y	EP 0 713 791 A (THYSSEN UMFORMTECH GMBH ;VAW VER ALUMINIUM WERKE AG (DE)) 29 May 1996 (1996-05-29)	1,2
A	page 4, line 54 -page 5, line 3; figures 1,3,6.1	6,9
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 04, 30 April 1999 (1999-04-30) & JP 11 011133 A (MAZDA MOTOR CORP), 19 January 1999 (1999-01-19) abstract; figures	1,2,8,9
A	PATENT ABSTRACTS OF JAPAN vol. 007, no. 207 (M-242), 13 September 1983 (1983-09-13) & JP 58 105815 A (TOYO KOGYO KK), 23 June 1983 (1983-06-23) abstract	1,2,9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/12337

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0743205	A	20-11-1996	FR 2734207 A1 AT 165285 T BR 9608771 A CZ 9703669 A3 DE 69600251 D1 DE 69600251 T2 EP 0743205 A1 ES 2115420 T3 WO 9636503 A1 NO 975307 A RO 117605 B1 SI 743205 T1 SK 150197 A3	22-11-1996 15-05-1998 06-07-1999 18-02-1998 28-05-1998 19-11-1998 20-11-1996 16-06-1998 21-11-1996 19-11-1997 30-05-2002 31-10-1998 04-03-1998
US 4486030	A	04-12-1984	JP 58090814 U	20-06-1983
US 6047978	A	11-04-2000	JP 10236123 A DE 19808172 A1	08-09-1998 03-09-1998
US 4432564	A	21-02-1984	DE 3200776 A1 IT 1128955 B FR 2487262 A1	28-07-1983 04-06-1986 29-01-1982
US 4165098	A	21-08-1979	CA 1088112 A1 MX 147078 A	21-10-1980 30-09-1982
US 6059314	A	09-05-2000	DE 19649076 A1 DE 29719347 U1	28-05-1998 15-01-1998
EP 0861744	A	02-09-1998	DE 19707643 C1 DE 59801202 D1 EP 0861744 A2 US 5909888 A	24-12-1998 20-09-2001 02-09-1998 08-06-1999
EP 0713791	A	29-05-1996	DE 4441971 A1 DE 59504971 D1 EP 0713791 A1 ES 2133647 T3 US 6099084 A US 5800024 A	30-05-1996 11-03-1999 29-05-1996 16-09-1999 08-08-2000 01-09-1998
JP 11011133	A	19-01-1999	NONE	
JP 58105815	A	23-06-1983	NONE	